

LED A-LINE SERIES

FEATURES

- Environmentally friendly; mercury free
- High quality heat dissipation
- The body material is plastic with aluminum housing
- Energy savings ROI in up to 18 months
- Dimmable (Available on selected dimmers - see compatibility chart)
- UL & ENERGY STAR listed
- Suitable for damp locations
- Five-year warranty

APPLICATION

Hotels, Restaurants, Retail, Residential





SA: STOCK AVAILABLE/NO BACKORDERS

Technical Specification

Part No.	Watt. (W)	Lumens (lm)	CCT(K)	Size (inch)	Weight (lb)	Base Type	HID/CFL Equiv.	Live Status
RA60D007X0109	7	450	2700	Ø2.36"*H4.29"	0.12	E26	40/13	SA
RA60D007X0110	7	450	3000	Ø2.36"*H4.29"	0.12	E26	40/13	SA
RA60D007X0111	7	450	4000	Ø2.36"*H4.29"	0.12	E26	40/13	SA
RA60D007X0112	7	450	5000	Ø2.36"*H4.29"	0.12	E26	40/13	SA
RA60D010X0109	9.8	800	2700	Ø2.36"*H4.29"	0.15	E26	60/32	SA
RA60D010X0110	9.8	800	3000	Ø2.36"*H4.29"	0.15	E26	60/32	SA
RA60D010X0111	9.8	800	4000	Ø2.36"*H4.29"	0.15	E26	60/32	SA
RA60D010X0112	9.8	800	5000	Ø2.36"*H4.29"	0.15	E26	60/32	SA

CRI(Ra)	80
PF	0.7
Beam Angle	290
LED Chip	SEOUL
LED Driver	OWN
Dimmable	YES
Working Temperature (°C)	-20~+40
Lifetime (H)	25000
Suitable Location	Damp

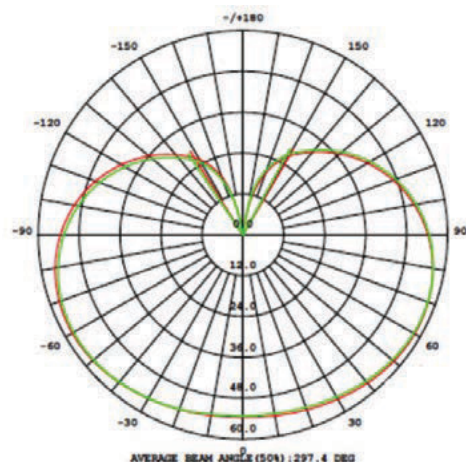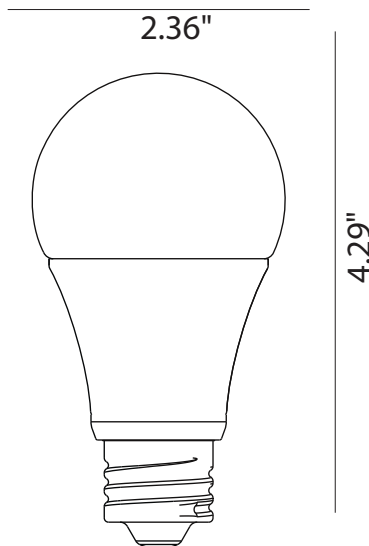

6.

The Replacement information listed is provided to help inform users of the various assumptions, factors, and methods involved when making lighting replacement decisions, and is for general information purposes only. ReneSola America disclaims all responsibility for any outcomes resulting from the use of this tool. Any reliance you place on this tool is therefore strictly at your own risk.

RENESOLA AMERICA INC.
1300 Clay Street, Suite 550, Oakland, CA 94612
us.renesola.com | +1(415)-852-7421
marketing.us@renesola.com