


LED 2x2 DIMMABLE PANEL

FEATURES

- Environmentally friendly; free of mercury, UV and IR emissions
- Ultra slim LED panel light
- Energy savings of approximately 70%
- High lumen efficiency and high CRI
- Instant-on (No delay)
- Power factor of over 0.9
- Powder coated white frame
- Dimmable (0-10V - Available on selected dimmers- see compatibility chart)
- UL & DLC listed
- Suitable for damp locations

APPLICATION

Hotels, Restaurants, Retail


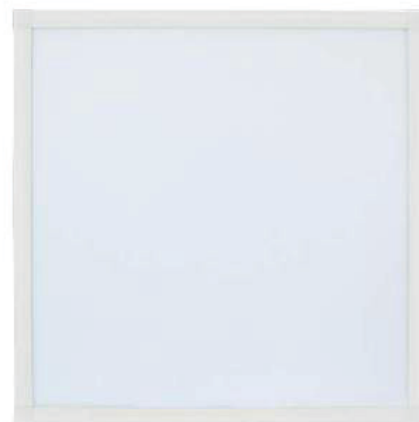


SA : STOCK AVAILABLE/NO BACKORDERS

Technical Specification

Part No.	Watt. (W)	Lumens (lm)	CCT(K)	Fluorescent	DLC	Live Status
RELPL-2240W50KD	40	4000	5000	2x2 2 tube T8 18w	LISTED	SA
CRI(Ra)	80					
PF	0.9					
Dimmable	YES					
Working Temperature (C°)	-20°C~+55°C					
Lifetime (H)	50000					
Suitable Location	Damp					

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

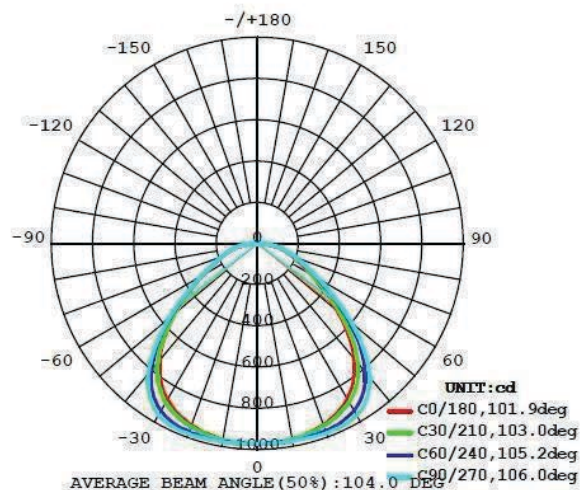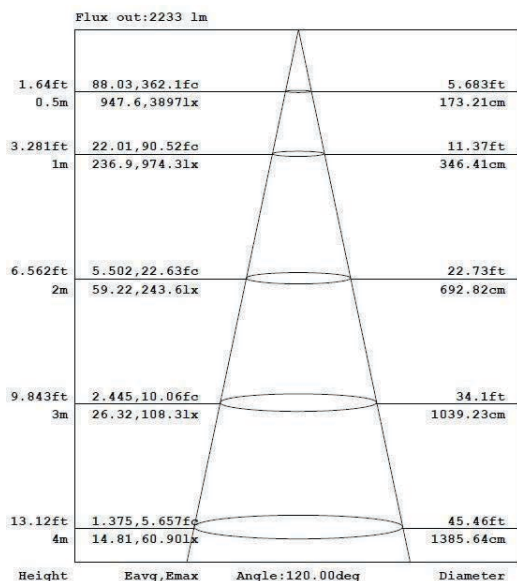


LED 2x4 DIMMABLE PANEL

FEATURES

- Environmentally friendly; free of mercury, UV and IR emissions
- Ultra slim LED panel light
- Energy savings of approximately 70%
- High lumen efficiency and high CRI
- Instant-on (No delay)
- Power factor of over 0.9
- Powder coated white frame
- Dimmable (0-10V - Available on selected dimmers- see compatibility chart)
- UL & DLC listed
- Suitable for damp locations

APPLICATION

Hotels, Restaurants, Retail


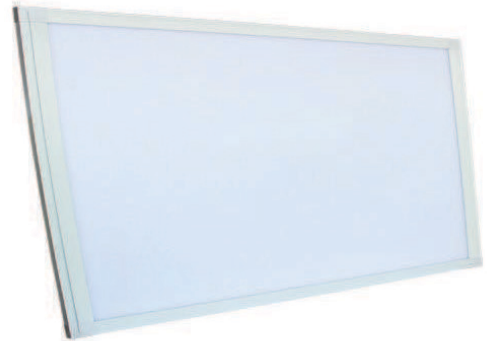


SA : STOCK AVAILABLE/NO BACKORDERS

Technical Specification

Part No.	Watt. (W)	Lumens (lm)	CCT(K)	Fluorescent	DLC	Live Status
REL2450W40KD	50	5000	4000	2x4 2 tube T8 32w	LISTED	SA
CRI(Ra)	80					
PF	0.9					
Dimmable	YES					
Working Temperature (C°)	-20°C~+55°C					
Lifetime (H)	50000					
Suitable Location	Damp					

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

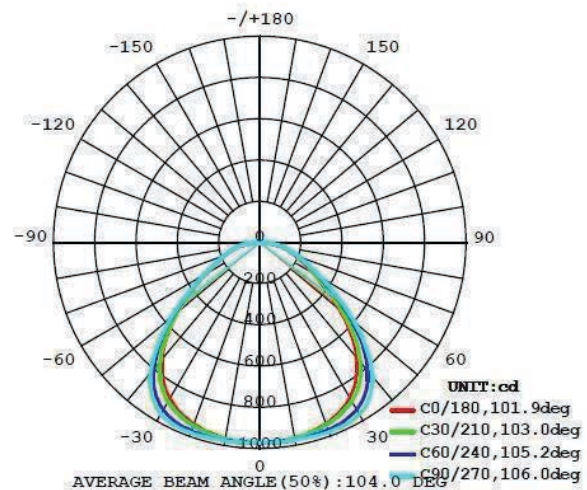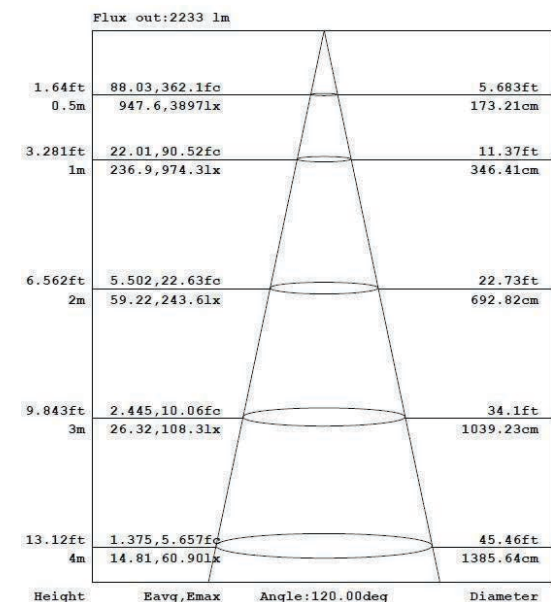

29.

The Replacement information listed is provided to help inform users of the various assumptions, factors, and methods involved when making lighting replacement decisions, and is for general information purposes only. ReneSola America disclaims all responsibility for any outcomes resulting from the use of this tool. Any reliance you place on this tool is therefore strictly at your own risk.

RENESOLA AMERICA INC.
1300 Clay Street, Suite 550, Oakland, CA 94612
us.renesola.com | +1(415)-852-7421
marketing.us@renesola.com