

## LED VOLUMETRIC TROFFER

### FEATURES

- Environmentally friendly; mercury free
- Installs recessed with T-bar grid
- Highly reflective powder coat finish
- Diffuser lens provides even and consistent light while eliminating pixelation
- Powder coated white frame
- Dimmable (0-10V - Available on selected dimmers- see compatibility chart)
- UL & DLC listed
- Suitable for dry locations
- Five-year warranty

### APPLICATION

Offices, Retail, Buildings





SA : STOCK AVAILABLE/NO BACKORDERS

### Technical Specification

Part No.	Watt. (W)	Lumens (lm)	CCT(K)	Fluorescent	DLC	Live Status
RLT-CB-22L/840	24	2291	4000	2x2 2 tube 18W	LISTED	SA
RLT-CB-22L/850	24	2348	5000	2x2 2 tube 18W	LISTED	SA
RLT-CB-22H/840	36	3510	4000	2x2 3-4 tube 18W	LISTED	SA
RLT-CB-22H/850	36	3563	5000	2x2 3-4 tube 18W	LISTED	SA
RLT-CB-24L/840	42	4410	4000	2x4 2-4 tube 32W	LISTED	SA
RLT-CB-24L/850	42	4505	5000	2x4 2-4 tube 32W	LISTED	SA

PF	0.95
Beam Angle	120
Dimmable	YES
Driver Brand	Lyford
Working Temperature (C°)	-20~+55°C
Lifetime (H)	50000
Suitable Location	Dry

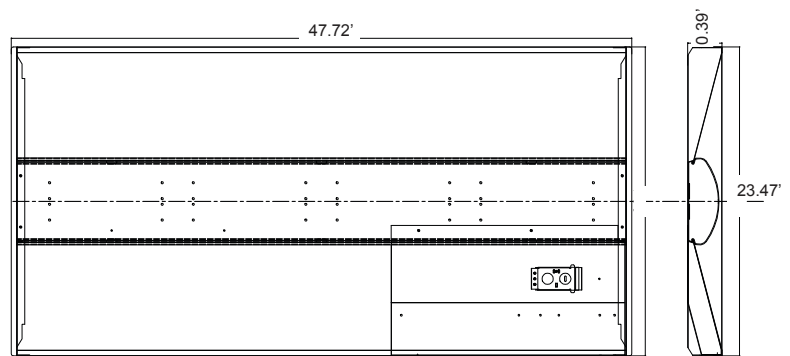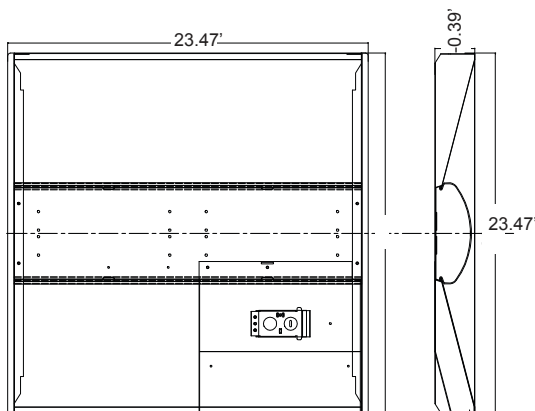

34.

The Replacement information listed is provided to help inform users of the various assumptions, factors, and methods involved when making lighting replacement decisions, and is for general information purposes only. ReneSola America disclaims all responsibility for any outcomes resulting from the use of this tool. Any reliance you place on this tool is therefore strictly at your own risk.

**RENESOLA AMERICA INC.**  
 1300 Clay Street, Suite 550, Oakland, CA 94612  
 us.renesola.com | +1(415)-852-7421  
 marketing.us@renesola.com